

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
06.03.2002 Bulletin 2002/10

(51) Int Cl.7: **H04B 7/06**

(21) Application number: 01307097.4

(22) Date of filing: 21.08.2001

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
 MC NL PT SE TR**
 Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:

- Wu, Shiquan
Nepean, Ontario, K2G 6L8 (CA)
- Tong, Wen
Ottawa, Ontario K2C 3L7 (CA)
- Strawczynski, Leo
Ottawa, Ontario K2A 2J5 (CA)

(30) Priority: 01.09.2000 US 229972 P
29.12.2000 US 750804

(71) Applicant: Nortel Networks Limited
St. Laurent, Quebec H4S 2A9 (CA)

(74) Representative: **Mackenzie, Andrew Bryan et al**
Sommerville & Rushton, 45 Grosvenor Road
St Albans, Herts. AL1 3AW (GB)

(54) Adaptive time diversity and spatial diversity for OFDM

(57) An adaptable orthogonal frequency-division multiplexing system (OFDM) that uses a multiple input multiple output (MIMO) to having OFDM signals transmitted either in accordance with time diversity to reducing signal fading or in accordance with spatial diversity to increase the data rate. Sub-carriers are classified for

spatial diversity transmission or for time diversity transmission based on the result of a comparison between threshold values and at least one of three criteria. The criteria includes a calculation of a smallest eigen value of a frequency channel response matrix and a smallest element of a diagonal of the matrix and a ratio of the largest and smallest eigen values of the matrix.

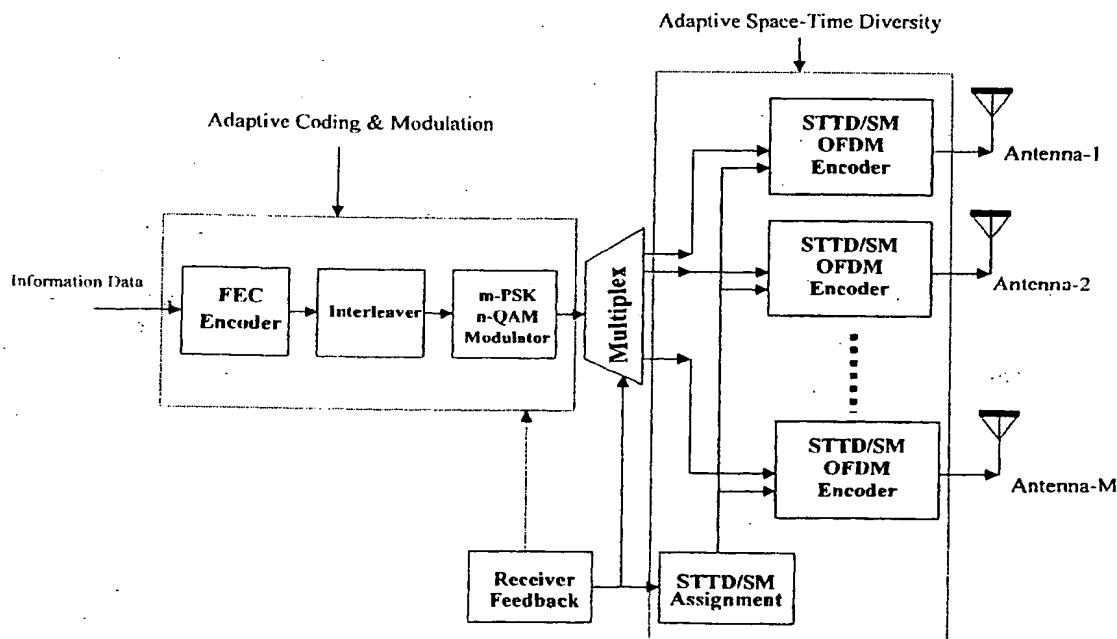


Figure-1

Description

CROSS-REFERENCE TO RELATED PATENT APPLICATIONS

5 [0001] Reference is made copending patent application entitled: CHANNELS ESTIMATION FOR MULTIPLE INPUT - MULTIPLE OUTPUT, ORTHOGONAL FREQUENCY DIVISION MULTIPLEXING (OFDM) SYSTEM, and whose contents are incorporated by reference with respect to channels estimation. This application is a utility patent application based on provisional patent application serial 30/229972, filed September 1, 2000.

10 BACKGROUND OF THE INVENTION

Field of the Invention

15 [0002] The invention relates to adapting time diversity and spatial diversity for use in an orthogonal frequency-division multiplexing (OFDM) environment, using a multiple input and multiple output (MIMO) structure.

Discussion of Related Art

20 [0003] A multiple input, multiple output (MIMO) structure has multiple communication channels that are used between transmitters and receivers. A space time transmitter diversity (STTD) system may be used on a MIMO structure, but it will not increase the data throughput. Indeed, for a high level configuration, the data rate may even reduce. In an STTD system, the transmitters deliver the same information content within consecutive symbol duration so that time diversity may be exploited. To efficiently use the multiple transmitters of the MIMO structure, however, the transmission data rate needs to be increased.

25 [0004] The most straightforward solution to increase the transmission data rate is to in forward error correction (FEC) dump independent data to each transmitter. A forward error correction (FEC) encoder produces in-phase and quadrature-phase data streams for the digital QAM modulator in accordance with a predetermined QAM constellation. The QAM modulator may perform baseband filtering, digital interpolation and quadrature amplitude modulation. The output of the QAM modulator is a digital intermediate frequency signal. A digital to analog (D/A) converter transforms the digital IF signal to analog for transmission.

30 [0005] The problem arises, however, as to how to safely recover the transmitted data. For a 2x2 system (two transmitters, two receivers) for example, after the channel information is obtained, the recovery process entails formulating two equations with two unknowns that need to be solved. The two unknowns may be determined only if the 2x2 channel is invertible. In practice, however, two situations may be encountered, i.e., the channel matrix is rank deficient so the unknowns cannot be determined or the frequency response channel matrix is invertible but has a very small eigen value.

35 [0006] The first situation arises when the channels are highly correlated, which may be caused either by not enough separation of the transmitters or by homology of the surroundings. For the second situation, although the equations are solvable, the solution can cause a high bit error rate (BER), because a scale up of the noise can result in an incorrect constellation point.

40 [0007] Orthogonal frequency-domain multiplexing (OFDM) systems were designed conventionally for either time diversity or for space diversity, but not both. The former will provide a robust system that combats signal fading but cannot increase the data rate capacity, while the latter can increase the data rate capacity but loses the system robustness. An OFDM signal contains OFDM symbols, which are constituted by a set of sub-carriers and transmitted for a fixed duration.

45 [0008] The MIMO structure may be used for carrying out time diversity for an OFDM system. For instance, when one transmitter transmits an OFDM signal, another transmitter will transmit a fully correlated OFDM signal to that transmitted by the one transmitter. The same OFDM signal is transmitted with, for instance, a fixed OFDM duration.

[0009] On the other hand, spatial diversity entails transmitting independent signals from different transmitters. Thus, transmitting two independent OFDM signals from two transmitters, respectively, results in a double data rate capacity from the parallel transmission that occurs.

50 [0010] When the signal to noise ratio (SNR) is low, the frame error rate (FER) is large, so that a data packet transmission will be decoded incorrectly and will need to be retransmitted. The quality of service (QoS) defines the number of times that the same packet can be retransmitted, eg., within an OFDM architecture. The OFDM system on a MIMO structure, therefore, should be adaptable to ensure that the QoS is maintained.

55 [0011] For any given modulation and code rate, the SNR must exceed a certain threshold to ensure that a data packet will be decoded correctly. When the SNR is less than that certain threshold, the bit error rate (BER) will be larger, which results in a larger FER. The larger the FER, the more retransmissions of the same packet will be required until the packet is decoded correctly. Thus, steps may need to be taken to provide the OFDM system with a higher

gain. If the SNR is at or above the threshold, then there is no need to increase the gain of the architecture to decode the data packets correctly. One challenge is to adapt the OFDM system to use time diversity when signal fading is detected as problematic and to use spatial diversity at other time to increase the data rate transfer.

[0012] In a conventional OFDM system, there are many OFDM modes, for examples are the 1k mode (1024 tones) and the half k mode (512 tones). For 1k mode, the number of sub-carriers is 1024 and for the half k mode, the number of sub-carriers is 512. The 1k mode is suitable for a channel with long delay and slow temporal fading, while the 512 mode is suitable for the channel with a short delay and fast temporal fading. But which mode will be used is really depending on the real environment.

[0013] A transaction unit of a conventional OFDM signal is an OFDM frame that lasts 10 ms. Each OFDM frame consists of 8 OFDM slots and each slot lasts 1.25 ms. Each OFDM slot consists of 8 OFDM symbols and some of the OFDM symbols will be the known preambles for access and channels estimation purposes. An OFDM super frame is made up of 8 OFDM frames and lasts 80 ms.

[0014] In addition to transmitted data, an OFDM frame contains a preamble, continual pilot sub-carriers, and transmission parameter sub-carriers/scattered sub-carriers. The preamble contains OFDM symbols that all used for training to realize timing, frequency and sampling clock synchronization acquisitions, channel estimation and a C/I calculation for different access points.

[0015] The continual pilot sub-carriers contain training symbols that are constant for all OFDM symbols. They are used for tracking the remaining frequency/sampling clock offset after the initial training.

[0016] The transmission parameter sub-carriers/scattered sub-carriers are dedicated in each OFDM symbol and reserved for signaling of transmission parameters, which are related to the transmission scheme, such as channel coding, modulation, guarding interval and power control. The transmission parameter sub-carriers are well protected and therefore can be used as scattered pilot sub-carriers after decoding.

[0017] One application for determining whether sub-carriers should be assigned to time diversity or spatial diversity is to conform with statistical analysis of traffic demands during particular times of the day, such as peak and off-peak. The OFDM system may preferably bias toward either time diversity or spatial diversity based on such a statistical analysis.

BRIEF SUMMARY OF THE INVENTION

[0018] One aspect of the invention pertains to employing adaptive STDD and spatial multiplexing (SM) based on comparing the channel condition of each sub-carrier with a threshold. When a sub-carrier is accommodated on channels that have a "well conditioned" channel matrix, spatial multiplexing may be used to create independent transmission paths and therefore increase the data rate. A "well conditioned" channel matrix arises when the smallest eigen value is not too small as compared to a threshold value, such as the noise power increase when multiplied by its inverse. For those sub-carriers whose channel matrices have smaller eigen values, the receiver cannot recover the parallel transmitted information symbols. As a result, STTD is used to guarantee a robust system.

[0019] Encoders associated with the transmitter side encode or classify sub-carriers in accordance with one of two groups based on a feedback signal; one of the groups is to forward error correction (FEC) time diversity and the other of the two groups is to forward error correction (FEC) spatial diversity. This grouping is based on results from a comparison made at the receiver side between a threshold value and either a calculated smallest eigen value of a frequency response matrix, the smallest element in a diagonal of the matrix, or a ratio of the largest and smallest eigen values in the matrix.

[0020] The threshold value is based on the transmitter and receiver antenna configuration, environmental constraints of the OFDM communication system, and/or on statistical analysis of communication traffic demands. The estimate value is derived from channel estimation of multiple channels of multi-input multi-output (MIMO) type systems.

[0021] Time diversity is used to reduce adverse signal fading. Spatial diversity is used to increase the data rate, which time diversity cannot do. When sub-carriers use time diversity, it means that signal fading is strong so that parallel transmission of data packets can not be done to overcome the insufficient gain problem. Instead, time diversity is used to get the necessary gain for the OFDM system, even though the data rate capacity suffers. An SNR gain is assured with time diversity, because of the orthogonality matrix pattern inherent among transmitted samples in the OFDM system. On the other hand, when sub-carriers use spatial diversity, signal fading is weak so that parallel transmissions may occur to increase the data rate capacity. Thus, there is no need to increase the gain of the OFDM system, which means that the data rate may be increased.

[0022] In operation, the OFDM system of the invention may start transmission of data packets with either time diversity or spatial diversity. The receiver side will estimate the channels and decode the data packets. After the channel information is obtained, the receiver side will calculate the eigen values of the channel matrices to the extent possible. The controller then determines whether the sub-carrier to use time diversity or spatial diversity based on one of three criteria (only one of which is dependent upon the eigen value calculation). The receiver then reports back or feedbacks to the

transmitter side with this information, i.e., about whether the sub-carrier is to use time diversity or spatial diversity so as to trigger the next round of transmission accordingly.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

[0023] For a better understanding of the present invention, reference is made to the following description and accompanying drawings, while the scope of the invention is set forth in the appended claims.

[0024] Fig. 1 is a schematic representation of a generic multi-input, multi-output orthogonal frequency-division multiplexing transmitter in accordance with an embodiment of the invention.

[0025] Fig. 2 is a schematic representation of an orthogonal frequency-division multiplexing symbol.

[0026] Fig. 3 is a space time transmitter diversity (STTD) orthogonal frequency-division multiplexing (OFDM) encoder for loading data to a sub-carrier in G1 which will be specified in the forthcoming sections.

[0027] Fig. 4 is a spatial multiplexing (SM) orthogonal frequency-division multiplexing (OFDM) encoder for loading data to a sub-carrier in G2 which will be specified in the forthcoming sections.

[0028] Fig. 5 is a schematic representation of two pure STTD transmitters that save one half of the IFFT computation.

[0029] Fig. 6 is a schematic representation of four pure STTD transmitters that save three fourths of the IFFT computation.

[0030] Fig. 7 is a schematic representation a generic receiver structure.

[0031] Fig. 8 is a schematic representation of configurations of a two receiver antenna case and a three receiver antenna case.

DETAILED DESCRIPTION OF THE INVENTION

[0032] The invention concerns a practical time and spatial diversity combination that fits into an OFDM system. The OFDM system of the invention can automatically adapt the channel variation and make trade off between time diversity and spatial diversity. In an exemplary environment, the data rate can be increased 1.8 times for 2x2 configuration (2 transmitters, 2 receivers), which gives 80 Mbps, and 2.7 times for 3x3 configuration (3 transmitters, 3 receivers) which gives 121 Mbps within 6MHz, while keep the robustness of the system.

[0033] Turning to the drawing, Figure 1 shows a generic MIMO and OFDM transmitter system. In the figure, STTD and SM are the abbreviations of Space-Time-Transmitter Diversity and Spatial Multiplexing. The MIMO OFDM is configured as two level adaptations as shown in Figure 1, namely, space/time diversity adaptation and coding/modulation adaptation. The space/time diversity adaptation is determined by the carrier to interference power ratio or signal to noise power ratio.

[0034] Information data is fed into adaptive coding modulation, the modulation is multiplexed and fed into adaptive space/time diversity encoding and assignment. A receiver feedback to provide feedback signals to the adaptive coding of modulation, multiplexer and adaptive space/time diversity is also provided. The multiplexed signals in the adaptive space/time diversity pass through STTD/SM OFDM encoders and the encoded signals transmit to associated antennas. The adaptive coding and modulation includes a forward error correction (FEC) encoder, an interleaver and an m-PSK modular.

[0035] If x MHz bandwidth is available, then Orthogonal Frequency Division Multiplexing OFDM is to chop this whole spectrum into many small pieces of equal width and each of them will be used as a carrier. The width of the piece will be determined by delay spread of the targeted environment.

[0036] The STTD/OFDM encoder is responsible for the assignment of the constellation points to each sub-carrier. For M transmitters, M OFDM symbols data are loaded in general (so the bit loading will be calculated according to this number), but it will depend on the STTD structure. Figure 2 illustrates one OFDM symbol.

[0037] For each sub-carrier that is indexed k , its loading will be determined by its corresponding channel condition. For N receivers, the frequency channel responses may be represented by an $M \times N$ matrix, say $H(k)$. The channel condition will be described by one of the following 3 criteria.

1. Smallest eigen value of $H(k)H(k)^*$
2. Smallest element of the diagonal of $H(k)H(k)^*$
3. The ratio of largest and smallest eigen values of $H(k)H(k)^*$

[0038] A set of thresholds for each criterion and for each system configuration is used. These thresholds will be service parameters and can be used as quality of service (QoS) or billing purposes.

[0039] With each criterion and a given threshold, all the sub-carriers will be classified into two groups G1 and G2 by a controller at the receiver side. The controller directs the transmission of a feedback signal indicative of the result of the classification. The feedback signal is received at the transmitter side and interpreted by a controller at the transmitter

side. The sub-carriers classified in G1 will use STTD encoder at the transmission side while those classified in G2 will use the SM encoder at the transmission side.

[0040] After the subcarriers have been classified into the two groups G1 and G2, the modulation scheme on each sub-carrier will be determined by the estimated C/I (carrier to interference ratio) or SNR (signal to noise ratio). As a result, a modulation scheme, such as of QPSK or m-PSK or various QAM, will be selected to satisfy QoS (quality of service) based on the determination made by the estimated C/I or SNR. This is another level adaptation that may maximize the throughput gain.

[0041] For instance, when the QoS is defined, the FER (frame error rate) may be ten percent. The goal is to choose a modulation scheme according to the perceived C/I or SNR to satisfy this QoS, yet still maximizing the throughput of data flow. To achieve this, a pre-defined look-up table may be accessed that is in accordance with various QoS.

[0042] In determining which modulation scheme will satisfy the criteria, the C/I or SNR estimation is done during mobile access, after looking for the strongest signal from the base station first. Based on such knowledge and estimation, one is able to get a rough idea as to which modulation scheme should be used. Regardless of the modulation scheme selected initially, the invention is configured to automatically adapt toward whichever modulation scheme represents the optimal modulation.

[0043] Fig. 3 shows how to load data on sub-carrier k for a situation involving 2 transmitters for example. This data loading is done within a pair of OFDM symbols. As can be appreciated, apparently one sample has been transmitted twice within 2 OFDM symbols duration via 2 transmitters. Thus, the data rate is the same as for the one transmitter OFDM system.

[0044] Fig. 4 shows how to load data on sub-carrier k in G2 for a situation involving 2 transmitters. In this case, each transmitter transmits independent data and therefore the data rate is double for 2 transmitters and M times for M transmitters.

[0045] The adaptive time diversity and spatial diversity for OFDM works as follows. Starting out, an STTD mode is used for all sub-carriers. The receiver estimates the channel profiles and then directs a feedback of its preference either to STTD or spatial multiplexing (SM) on each sub-carrier.

[0046] The whole sub-carrier indices $\{K_{\min}, K_{\min}+1, \dots, K_{\max}\}$ are then divided into two disjoint subsets I_{std} and I_{sm} . The one with fewer elements will be the feedback to the transmitters. The extreme case is that one of them is an empty set, which means use of either pure STTD or pure SM. As in the pure STTD system, the transmitters always consider two OFDM symbols as the basic transmission unit for 2x2 configuration and M OFDM symbols for a system has M transmitters.

[0047] The number of input bits, however, needs to be calculated according to a modulation scheme and a dynamic distribution of I_{std} and I_{sm} . More precisely, the number of bits needed for the two consecutive OFDM symbols is $2 \times (I_{\text{std}}L + 4 \times I_{\text{sm}}L)$, where L is the modulation level which equals to 2, 3, 4, 5, 6, 7, 8.

[0048] When a granularity problem arises, the two OFDM symbols are repacked to fit the granularity by removing some sub-carriers from I_{sm} into I_{std} . This may sacrifice the data rate somewhat, but keep the system robust.

[0049] In the receiver side, a quadrature amplitude modulation QAM de-mapping block is used to de-map the received data according to I_{std} and I_{sm} .

[0050] STTD is the baseline of the service quality. This means that when parallel transmission is carried out in the designated communication channels, then it is guaranteed parallel transmission, because the BER or FER will be controlled to achieve the necessary QoS. The transmitters will propagate the transmissions at the same constant power and the modulation will be the same for each transmitter. Thus, no power pouring technique needs to be employed.

[0051] Three thresholds are used to classify the sub-carriers. Indeed, the threshold can be used as a service parameter and tuned aggressive to either STTD mode or SM mode according to customer demand, i.e., based on statistical analysis of that demand.

[0052] As an example, for the case where the smallest eigen value is used as the threshold in a 2x2 configuration (2 transmitters, 2 receivers), there is a 60 % opportunity to do parallel transmission with 0.5 as the threshold value, which may be scale the noise 3 dB up. for a 2x4 configuration (2 transmitters, 4 receivers), there is an 80 % opportunity to do parallel transmission with 1 as the threshold value, which may even reduce the noise.

[0053] Fig. 5 shows a special, but very practical situation, which shows two pure STTD transmitters that save $\frac{1}{2}$ of an inverse fast Fourier transform (IFFT) computation. The present invention may automatically switch to this scenario in a vulnerable environment involving 2 transmitters.

[0054] Conventionally, one would expect each transmitter to transmit 2 OFDM symbols every 2 OFDM symbol duration. Thus, there are 4 OFDM symbols transmitted for every 2 OFDM duration that go through a respective independent IFFT computation engine. This means that a complex number IFFT computation is expected to be conducted four times.

[0055] For a pure STTD implementation with 2 and 4 transmit antennas, the computational efficient implementation is shown in Figures 5 and 6 respectively. The scheme in Figure 5 requires $\frac{1}{2}$ of the IFFT computation and the scheme in Figure 6 requires $\frac{1}{4}$ of the IFFT computation as compared with a straightforward implementation that performs the

computations separately.

[0056] In accordance with Fig. 5, however, there is data crossing between two transmitters, which saves two IFFT computations. Yet, it provides four IFFT outputs, which is exactly the same results where four independent IFFTs are used. Although four IFFT operations are shown in Fig. 5, they are operating on real vectors, which means the computational complexity of a real IFFT equals the complex IFFT with a half size. Therefore, the computational time saving comes from the relationship between IFFT on a vector and its conjugate.

[0057] In Fig. 5, the bits are coded bits, which are the input to variable M-PSK/QAM mapping. The mapping will map the bits to the corresponding constellation points according to the Gray rule; constellation points here refer to any modulation scheme, such as QPSK, m-PSK, QAM, etc. The constellation vector will be inserted with a pilot into a multiplex and then into first in first out (FIFO) buffers.

[0058] The designations $S_0, S_1, S_2, S_3, S_{2046}, S_{2047}$ in the FIFO buffer represent complex vectors. The function $\text{Re}\{\}$ refers to just taking the real part of the complex vector. The designation $\text{Im}\{\}$ refers to just taking the imaginary part of the complex vector. The real and imaginary parts are fed as input into IFFTs. The designation D/A refers to a digital to analog converter.

[0059] The transmission order for the first transmitter is OFDM symbol b and then d ...; the transmission order for the second transmitter is OFDM symbol g and then f etc. Before each OFDM symbol is transmitted, the cyclic extension will be appended somewhere in the OFDM symbol.

[0060] Periodically inserted preambles will serve for the timing recovery, framing, frequency offset estimation, clock correction and overall channel estimation. The estimated channel samples will be used for the continuous spectrum channel reconstruction. Pilot symbols will serve for phase correction, final tuning of channel estimation.

The mathematical equivalence for Fig. 5 is as follows

$$b = \text{IFFT} \begin{bmatrix} S_0 \\ S_2 \\ \vdots \\ S_{2046} \end{bmatrix}, \quad d = \text{IFFT} \begin{bmatrix} -S_1^* \\ -S_3^* \\ \vdots \\ -S_{2047}^* \end{bmatrix}, \quad f = \text{IFFT} \begin{bmatrix} S_1 \\ S_3 \\ \vdots \\ S_{2047} \end{bmatrix}, \quad g = \text{IFFT} \begin{bmatrix} S_0^* \\ S_2^* \\ \vdots \\ S_{2046}^* \end{bmatrix}$$

[0061] Fig. 6 shows four Pure STTD Transmitters that represents a rate 3/4 STTD encoder as:

Tx1	$S(0)$	$-S(1)^*$	$S(2)^*/\sqrt{2}$	$S(2)/\sqrt{2}$
Tx2	$S(1)$	$S(0)^*$	$S(2)^*/\sqrt{2}$	$-S(2)/\sqrt{2}$
Tx3	$S(2)/\sqrt{2}$	$S(2)/\sqrt{2}$	$-\text{Re}\{S(0)\} + j\text{Im}\{S(1)\}$	$-\text{Re}\{S(1)\} + j\text{Im}\{S(0)\}$
Tx4	$S(2)/\sqrt{2}$	$S(2)/\sqrt{2}$	$\text{Re}\{S(1)\} + j\text{Im}\{S(0)\}$	$-\text{Re}\{S(0)\} - j\text{Im}\{S(1)\}$
Time	$[0 \ T]$	$[T \ 2T]$	$[2T \ 3T]$	$[3T \ 4T]$

Such an STTD encoder encodes every 3 OFDM symbols into 4 OFDM symbols and transmits to 4 antennas. Figure 6 scheme requires 1/4 IFFT computation compared to the straightforward implementation. The reason why computation is saved is for the same reasons as in Fig. 5. The parameters there are defined respectively as follows:

$$b = \text{IFFT} \begin{bmatrix} S_0 \\ S_3 \\ \vdots \\ S_{3069} \end{bmatrix}, \quad g = \text{IFFT} \begin{bmatrix} S_0^* \\ S_3^* \\ \vdots \\ S_{3069}^* \end{bmatrix}$$

$$f = IFFT \begin{bmatrix} S_1 \\ S_2 \\ \vdots \\ S_{3070} \end{bmatrix}, d = IFFT \begin{bmatrix} S_1^* \\ S_2^* \\ \vdots \\ S_{3070}^* \end{bmatrix}$$

$$q = IFFT \begin{bmatrix} S_2 \\ S_3 \\ \vdots \\ S_{3071} \end{bmatrix}, u = IFFT \begin{bmatrix} S_2^* \\ S_3^* \\ \vdots \\ S_{3071}^* \end{bmatrix}$$

[0062] Fig. 7 is an abstract diagram of a generic receiver structure.

STTD/SM OFDM decoder is sub-carrier based decoder. The structure and configuration of the STTD/SM OFDM decoder will depend on the architecture configuration.

Suppose sub-carrier m is STTD coded, i.e. m belongs to G_1 .

[0063] For a 2x2 configuration:

$S(2m)$ and $S(2m+1)$ are decoded by solving the following equations

$$\begin{bmatrix} y_1(q, m) \\ y_1(q+1, m)^* \end{bmatrix} = \begin{bmatrix} h_{11}(q, m) & h_{21}(q, m) \\ h_{21}(q, m)^* & -h_{11}(q, m)^* \end{bmatrix} \begin{bmatrix} s(2m) \\ s(2m+1) \end{bmatrix} + \begin{bmatrix} n_1(q, m) \\ n_1(q+1, m) \end{bmatrix}$$

[0064] The assumption here is that the even indexed sample $S(2m)$ is transmitted in q th OFDM and the odd indexed sample $S(2m+1)$ is transmitted in $(q+1)$ th OFDM symbol.

[0065] There are 4 equations and two unknowns. So a least mean square solution can be obtained by multiplying the coefficient matrix to the received data vector. With the above two pairs, we will get two estimated of the same pair of samples. Their average will be the output of the decoder.

[0066] More statistics are performed after regrouping the equations. In fact, every pair of the equations will result a solution, every 3 equations also provide a new estimation, and all the equations will give a solution too. There are 10 combinations in total and therefore 10 estimation with these 4 equations. Their average or partial average will be used as the solution.

[0067] A 2x3 configuration is similar to 2x2, involving 6 equations:

$$\begin{bmatrix} y_1(q, m) \\ y_1(q+1, m)^* \end{bmatrix} = \begin{bmatrix} h_{11}(q, m) & h_{21}(q, m) \\ h_{21}(q, m)^* & -h_{11}(q, m)^* \end{bmatrix} \begin{bmatrix} s(2m) \\ s(2m+1) \end{bmatrix} + \begin{bmatrix} n_1(q, m) \\ n_1(q+1, m) \end{bmatrix}$$

$$\begin{bmatrix} y_2(q, m) \\ y_2(q+1, m)^* \end{bmatrix} = \begin{bmatrix} h_{12}(q, m) & h_{22}(q, m) \\ h_{22}(q, m)^* & -h_{12}(q, m)^* \end{bmatrix} \begin{bmatrix} s(2m) \\ s(2m+1) \end{bmatrix} + \begin{bmatrix} n_2(q, m) \\ n_2(q+1, m) \end{bmatrix}$$

$$\begin{bmatrix} y_3(q, m) \\ y_3(q+1, m)^* \end{bmatrix} = \begin{bmatrix} h_{13}(q, m) & h_{23}(q, m) \\ h_{23}(q, m)^* & -h_{13}(q, m)^* \end{bmatrix} \begin{bmatrix} s(2m) \\ s(2m+1) \end{bmatrix} + \begin{bmatrix} n_3(q, m) \\ n_3(q+1, m) \end{bmatrix}$$

[0068] For a 2x4 configuration, there are 8 equations:

$$\begin{bmatrix} y_1(q, m) \\ y_1(q+1, m)^* \end{bmatrix} = \begin{bmatrix} h_{11}(q, m) & h_{21}(q, m) \\ h_{21}(q, m)^* & -h_{11}(q, m)^* \end{bmatrix} \begin{bmatrix} s(2m) \\ s(2m+1) \end{bmatrix} + \begin{bmatrix} n_1(q, m) \\ n_1(q+1, m) \end{bmatrix}$$

$$\begin{bmatrix} y_2(q, m) \\ y_2(q+1, m)^* \end{bmatrix} = \begin{bmatrix} h_{12}(q, m) & h_{22}(q, m) \\ h_{22}(q, m)^* & -h_{12}(q, m)^* \end{bmatrix} \begin{bmatrix} s(2m) \\ s(2m+1) \end{bmatrix} + \begin{bmatrix} z_2(q, m) \\ z_2(q+1, m) \end{bmatrix}$$

$$\begin{bmatrix} y_3(q, m) \\ y_3(q+1, m)^* \end{bmatrix} = \begin{bmatrix} h_{13}(q, m) & h_{23}(q, m) \\ h_{23}(q, m)^* & -h_{13}(q, m)^* \end{bmatrix} \begin{bmatrix} s(2m) \\ s(2m+1) \end{bmatrix} + \begin{bmatrix} n_3(q, m) \\ n_3(q+1, m) \end{bmatrix}$$

$$\begin{bmatrix} y_4(q, m) \\ y_4(q+1, m)^* \end{bmatrix} = \begin{bmatrix} h_{14}(q, m) & h_{24}(q, m) \\ h_{24}(q, m)^* & -h_{14}(q, m)^* \end{bmatrix} \begin{bmatrix} s(2m) \\ s(2m+1) \end{bmatrix} + \begin{bmatrix} n_4(q, m) \\ n_4(q+1, m) \end{bmatrix}$$

[0069] For a 4x2 configuration, there are 8 equations and 3 unknowns

$$\begin{bmatrix} y_1(q, m) \\ y_1(q+1, m) \\ y_1(q+2, m) \\ y_1(q+3, m) \end{bmatrix} = \begin{bmatrix} s(3m-3) & s(3m-2) & \frac{s(3m-1)}{\sqrt{2}} & \frac{s(3m-1)}{\sqrt{2}} \\ -s(3m-2)^* & s(3m-3)^* & \frac{s(3m-1)}{\sqrt{2}} & -\frac{s(3m-1)}{\sqrt{2}} \\ \frac{s(3m-1)^*}{\sqrt{2}} & \frac{s(3m-1)^*}{\sqrt{2}} & \eta(m) & \kappa(m) \\ \frac{s(3m-1)^*}{\sqrt{2}} & -\frac{s(3m-1)^*}{\sqrt{2}} & \nu(m) & \zeta(m) \end{bmatrix} \begin{bmatrix} h_{11}(m) \\ h_{21}(m) \\ h_{31}(m) \\ h_{41}(m) \end{bmatrix} + \begin{bmatrix} n_{11} \\ n_{21} \\ n_{31} \\ n_{41} \end{bmatrix}$$

where

$$\begin{aligned} \eta(m) &= -\text{Re}(s(3(m-1))) + j \text{Im}(s(3(m-1)+1)), \\ \kappa(m) &= -\text{Re}(s(3(m-1)+1)) + j \text{Im}(s(3(m-1))), \\ \nu(m) &= \text{Re}(s(3(m-1)+1)) + j \text{Im}(s(3(m-1))), \\ \zeta(m) &= -\text{Re}(s(3(m-1))) - j \text{Im}(s(3(m-1)+1)), \end{aligned}$$

$h_{k1}(m)$ is the frequency channel response of the channel between transmitter k and receiver 1.
Similarly, the received data for the 4x2 configuration is

$$\begin{bmatrix} y_2(q, m) \\ y_2(q+1, m) \\ y_2(q+2, m) \\ y_2(q+3, m) \end{bmatrix} = \begin{bmatrix} s(3m-3) & s(3m-2) & \frac{s(3m-1)}{\sqrt{2}} & \frac{s(3m-1)}{\sqrt{2}} \\ -s(3m-2)^* & s(3m-3)^* & \frac{s(3m-1)}{\sqrt{2}} & -\frac{s(3m-1)}{\sqrt{2}} \\ \frac{s(3m-1)^*}{\sqrt{2}} & \frac{s(3m-1)^*}{\sqrt{2}} & \eta(m) & \kappa(m) \\ \frac{s(3m-1)^*}{\sqrt{2}} & -\frac{s(3m-1)^*}{\sqrt{2}} & \nu(m) & \zeta(m) \end{bmatrix} \begin{bmatrix} h_{12}(m) \\ h_{22}(m) \\ h_{32}(m) \\ h_{42}(m) \end{bmatrix} + \begin{bmatrix} n_{11} \\ n_{21} \\ n_{31} \\ n_{41} \end{bmatrix}$$

[0070] The solution will be the least mean square solution by enumerating all possibilities. Suppose instead that sub-carrier m is SM Coded, i.e. m belongs to G2. For a 2x2 configuration, there are 4 equations and 4 unknowns:

$$\begin{bmatrix} y_1(q, m) \\ y_2(q, m) \end{bmatrix} = \begin{bmatrix} h_{11}(q, m) & h_{21}(q, m) \\ h_{12}(q, m) & h_{22}(q, m) \end{bmatrix} \begin{bmatrix} s(2m) \\ s(2m+1) \end{bmatrix} + \begin{bmatrix} n_1(q, m) \\ n_2(q, m) \end{bmatrix}$$

$$\begin{bmatrix} y_1(q+1, m) \\ y_2(q+1, m) \end{bmatrix} = \begin{bmatrix} h_{11}(q, m) & h_{21}(q, m) \\ h_{12}(q, m) & h_{22}(q, m) \end{bmatrix} \begin{bmatrix} s(2m+2) \\ s(2m+3) \end{bmatrix} + \begin{bmatrix} n_2(q+1, m) \\ n_2(q+1, m) \end{bmatrix}$$

[0071] So the 4 unknowns can be estimated by the least mean square solutions.

[0072] For a 2x3 configuration, there are 6 equations and 4 unknowns.

$$\begin{bmatrix} y_1(q, m) \\ y_2(q, m) \\ y_3(q, m) \end{bmatrix} = \begin{bmatrix} h_{11}(q, m) & h_{21}(q, m) \\ h_{12}(q, m) & h_{22}(q, m) \\ h_{31}(q, m) & h_{32}(q, m) \end{bmatrix} \begin{bmatrix} s(2m) \\ s(2m+1) \end{bmatrix} + \begin{bmatrix} n_1(q, m) \\ n_2(q, m) \\ n_3(q, m) \end{bmatrix}$$

$$\begin{bmatrix} y_1(q+1, m) \\ y_2(q+1, m) \\ y_3(q+1, m) \end{bmatrix} = \begin{bmatrix} h_{11}(q+1, m) & h_{21}(q+1, m) \\ h_{12}(q+1, m) & h_{22}(q+1, m) \\ h_{31}(q+1, m) & h_{32}(q+1, m) \end{bmatrix} \begin{bmatrix} s(2m+2) \\ s(2m+3) \end{bmatrix} + \begin{bmatrix} n_1(q+1, m) \\ n_2(q+1, m) \\ n_3(q+1, m) \end{bmatrix}$$

[0073] For a 2x4 configuration, there are 8 equations and 4 unknowns.

[0074] For a 3x3 configuration, there are 9 equations and 9 unknowns.

[0075] In accordance with the inventive architecture, the data rate can be as high as 70 Mbps for 2x2 and 120 Mbps for 3x3 within 6 MHz spectrum.

[0076] An exemplary optimal threshold value for a 2x2 configuration is 0.5. An exemplary optimal threshold value for a 2x4 configuration is 1.0. An exemplary optimal threshold value for a 3x3 configuration is 1.2. An exemplary optimal threshold value for a 2x3 configuration is 1.0. By exemplary optimal threshold value, the intent is to attain a value that has a trade-off between time and spatial diversity that yields both a relatively high robustness and relatively high data packet rate transfer.

[0077] As can be appreciated for each of the afore-mentioned configurations, there are a certain number of equations and a certain number of unknowns. In an over-determined system, the number of equations is greater than the number of unknowns. Thus, for a 2x2 configuration, there are two unknowns but four equations may be formulated. If there is no noise, any two of them (six pairs), or any three of them (four triples) or all of the four equations (one quadratic) will give the same answer. The difference is when noise is present, because the combinations with then give different solutions. Since some of the solutions may be good while others are bad, different combinations are chosen, but those combinations that result in large derivations are to be avoided. The idea is to use a sub-set of the over determined linear equations to estimate the solution and then average all the possible solutions that seem viable. The averaging may be done with a least mean square solution, which is a conventional mathematical technique.

[0078] Figure 8 compares a two receiver antenna case and a three receiver antenna case. With respect to the three receiver antenna case, the number of receiver antennas is greater than the number of transmitter antennas. As a consequence, the receiver has additional redundancy, the receiver has various configurations, and the configurations yield several different decoding results. The most reliable solution can be selected from among them or all the solutions may be averaged to obtain a final result.

[0079] While the foregoing description and drawings represent the preferred embodiments of the present invention, it will be understood that various changes and modifications may be made without departing from the spirit and scope

of the present invention.

Claims

1. An apparatus for use with an adaptive orthogonal frequency division-multiplexing (OFDM) system that uses multiple input multiple output (MIMO) structure to transmit OFDM signals from a plurality of transmitters to a plurality of receivers, the OFDM signal having an OFDM frame of a duration, the OFDM frame having data packets and a plurality of OFDM slots, each of the OFDM slots having a plurality of OFDM symbols that include a plurality of sub-carriers, the apparatus comprising:

a receiver that responds to receipt of the OFDM signal by making a determination as to whether time diversity or spatial diversity should be used for subsequent transmissions and transmits a feedback signal indicative of that determination, an implementation of the time diversity resulting in a better robustness to counter signal fading than if the spatial diversity were implemented and an implementation of spatial diversity resulting in an increase in a rate of data packet transfer over that if the time diversity were implemented, because the OFDM signals that are transmitted over multiple ones of the transmitters are independent of each other for the spatial diversity and correspond to each other for the time diversity.
2. An apparatus as in claim 1, wherein the receiver includes a controller that makes the determination based on a comparison of a channel condition with a threshold, the channel condition being based on a frequency response channel matrix that is derived from OFDM symbols.
3. An apparatus as in claim 2, wherein the channel condition is based on a calculation of a smallest eigen value of the frequency response channel matrix.
4. An apparatus as in claim 2, wherein the channel condition is based on a determination of a smallest element in a diagonal of the frequency response channel matrix.
5. An apparatus as in claim 2, wherein the channel condition represents a ratio of largest and smallest eigen values of the channel matrix.
6. An apparatus as in claim 2, wherein the channel condition is based on one of three criteria selected from a group consisting of a calculation of smallest eigen values of the channel matrix, a smallest element in a diagonal of the channel matrix, and a ratio of largest and smallest eigen values of the channel matrix.
7. An apparatus as in claim 2, further comprising a channel estimator that forms the frequency response channel matrix.
8. An apparatus as in claim 2, wherein the controller is configured to classify the sub-carriers into one of two groups in accordance with the channel condition, one of the two groups being indicative of time diversity and the other of the two groups being indicative of spatial diversity, the controller being further configured to determine a modulation scheme on each of the classified sub-carriers based on an estimated ratio selected from a further group consisting of a carrier to interference ratio and a signal to noise ratio.
9. An apparatus for use with an adaptive orthogonal frequency division-multiplexing (OFDM) system that uses multiple input multiple output (MIMO) structure to transmit OFDM signals from a plurality of transmitters to a plurality of receivers, the OFDM signal having an OFDM frame of a duration, the OFDM frame having data packets and a plurality of OFDM slots, each of the OFDM slots having a plurality of OFDM symbols that include a plurality of sub-carriers, the apparatus comprising

at least one controller configured and arranged to respond to a feedback signal to direct an encoder to assign constellation points to the sub-carriers in accordance with a channel condition so as to classify each of the sub-carriers into one of two groups, the encoder including a space time transmitter diversity (STTD) encoder and a spatial multiplexing (SM) encoder, the STTD encoder being arranged to encode the sub-carriers classified in one of the groups in accordance with time diversity and the SM encoder being arranged to encode the sub-carriers classified in the other of the groups in accordance with spatial diversity, an implementation of the time diversity resulting in a better robustness to counter signal fading than if the spatial diversity were implemented and an implementation of spatial diversity resulting in an increase in a rate of data packet transfer over that if the time diversity were implemented, because the OFDM signals that are transmitted over multiple ones of the transmitters

are independent of each other for the spatial diversity and correspond to each other for the time diversity.

10. An apparatus as in claim 9, wherein the controller is configured to determine a modulation scheme on each of the sub-carriers based on an estimated ratio selected from a further group consisting of a carrier to interference ratio and a signal to noise ratio.
11. An apparatus for use with an adaptive orthogonal frequency division multiplexing (OFDM) system that uses multiple input multiple output (MIMO) structure to transmit OFDM signals from a plurality of transmitters to a plurality of receivers, the OFDM signal having an OFDM frame of a duration, the OFDM frame having data packets and a plurality of OFDM slots, each of the OFDM slots having a plurality of OFDM symbols that include a plurality of sub-carriers, the apparatus comprising:
controllers configured and arranged to direct transmission and reception in accordance with OFDM, the controllers including those associated with the reception that are configured to respond receipt of the OFDM signal by making a determination as to whether time diversity or spatial diversity should be used for subsequent transmissions and transmits a feedback signal indicative of that determination, an implementation of the time diversity resulting in a better robustness to counter signal fading than if the spatial diversity were implemented and an implementation of spatial diversity resulting in an increase in a rate of data packet transfer over that if the time diversity were implemented, because the OFDM signals that are transmitted over multiple ones of the transmitters are independent of each other for the spatial diversity and correspond to each other for the time diversity, the controllers associated with the reception being configured to direct that transmission of at least one feedback signal occur that reflects the determination, the controllers including those associated with the transmission that are responsive to receipt of the feedback signal to direct an encoder to assign constellation points to the sub-carriers in accordance with a channel condition so as to classify each of the sub-carriers into one of two groups, the encoder including a space time transmitter diversity (STTD) encoder and a spatial multiplexing (SM) encoder, the STTD encoder being arranged to encode the sub-carriers classified in one of the groups in accordance with the time diversity and the SM encoder being arranged to encode the sub-carriers classified in the other of the groups in accordance with the spatial diversity.
12. An apparatus as in claim 11, wherein the controller is configured to determine a modulation scheme on each of the sub-carriers based on an estimated ratio selected from a further group consisting of a carrier to interference ratio and a signal to noise ratio.
13. An apparatus as in claim 12, wherein the controllers associated with the reception are configured to make a calculation of eigen values of channel matrices to make a determination as to which sub-carriers are to use the time diversity to reduce signal fading forward error correction (FEC) during a subsequent transmission and which sub-carriers are to use the spatial diversity to increase a rate of data transfer during the subsequent transmission, the controllers associated with the reception being configured to make the determination based on a comparison between a threshold and at least one of three criteria and to direct transmission of a feedback signal indicative of a result of the determination, at least one of the criteria being based on the calculation, at least another of the criteria being based on elements of a diagonal of at least one of the channel matrices.
14. An apparatus as in claim 12, wherein the controllers associated with the reception are configured so to make the determination based on a comparison of a channel condition with a threshold, the channel condition being based on a frequency response channel matrix that is derived from OFDM symbols.
15. An apparatus as in claim 14, wherein the channel condition represents a calculation of a smallest eigen value of the frequency response channel matrix.
16. An apparatus as in claim 14, wherein the channel condition represents a determination of a smallest element in a diagonal of the frequency response channel matrix.
17. An apparatus as in claim 14, wherein the channel condition represents a ratio of largest and smallest eigen values of the channel matrix.
18. An apparatus as in claim 14, wherein the channel condition represents one of three criteria selected from a group consisting of a calculation of smallest eigen values of the channel matrix, a smallest element in a diagonal of the channel matrix, and a ratio of largest and smallest eigen values of the channel matrix.

19. An apparatus as in claim 14, further comprising a channel estimator that forms the frequency response channel matrix.
20. A method for use with an adaptive orthogonal frequency division -multiplexing (OFDM) system that uses multiple input multiple output (MIMO) structure to transmit OFDM signals from a plurality of transmitters to a plurality of receivers, the OFDM signal having an OFDM frame of a duration, the OFDM frame having data packets and a plurality of OFDM slots, each of the OFDM slots having a plurality of OFDM symbols that include a plurality of sub-carriers, the method comprising:
 - responding to receipt of the OFDM signal by making a determination as to whether time diversity or spatial diversity should be used for subsequent transmissions and transmits a feedback signal indicative of that determination, an implementation of the time diversity resulting in a better robustness to counter signal fading than if the spatial diversity were implemented and an implementation of spatial diversity resulting in an increase in a rate of data packet transfer over that if the time diversity were implemented, because the OFDM signals that are transmitted over multiple ones of the transmitters are independent of each other for the spatial diversity and correspond to each other for the time diversity.
21. A method as in claim 20, further comprising making the determination based on a comparison of a channel condition with a threshold, the channel condition being based on a frequency response channel matrix that is derived from OFDM symbols.
22. A method as in claim 21, further comprising calculating a smallest eigen value of the frequency response channel matrix basing the channel condition on the calculating.
23. An method as in claim 21, further comprising determining a smallest element in a diagonal of the frequency response channel matrix and basing the channel condition on the determining.
24. A method as in claim 21, further comprising calculating a ratio of largest and smallest eigen values of the channel matrix and basing the channel condition on the ratio.
25. A method as in claim 21, further comprising basing the channel condition on one of three criteria selected from a group consisting of a calculation of smallest eigen values of the channel matrix, a smallest element in a diagonal of the channel matrix, and a ratio of largest and smallest eigen values of the channel matrix.
26. A method as in claim 20, further comprising classifying the sub-carriers into two groups one of the two groups being indicative of time diversity and the other of the two groups being indicative of spatial diversity. determining a modulation scheme on each of the classified sub-carriers based on an estimated ratio selected from a further group consisting of carrier to interference ratio and signal to noise ratio.
27. A method for use with an adaptive orthogonal frequency division-multiplexing (OFDM) system that uses multiple input multiple output (MIMO) structure to transmit OFDM signals from a plurality of transmitters to a plurality of receivers, the OFDM signal having an OFDM frame of a duration, the OFDM frame having data packets and a plurality of OFDM slots, each of the OFDM slots having a plurality of OFDM symbols that include a plurality of sub-carriers, the method comprising
 - responding to a feedback signal to direct an encoder to assign constellation points to the sub-carriers in accordance with a channel condition so as to classify each of the sub-carriers into one of two groups, the encoder including a space time transmitter diversity (STTD) encoder and a spatial multiplexing (SM) encoder, the STTD encoder being arranged to encode the sub-carriers classified in one of the groups in accordance with time diversity and the SM encoder being arranged to encode the sub-carriers classified in the other of the groups in accordance with spatial diversity, an implementation of the time diversity resulting in a better robustness to counter signal fading than if the spatial diversity were implemented and an implementation of spatial diversity resulting in an increase in a rate of data packet transfer over that if the time diversity were implemented, because the OFDM signals that are transmitted over multiple ones of the transmitters are independent of each other for the spatial diversity and correspond to each other for the time diversity.
28. A method as in claim 27, further comprising classifying the sub-carriers into two groups, one of the two groups being indicative of time diversity and the other of the two groups being indicative of spatial diversity, determining a modulation scheme on each of the classified sub-carriers based on an estimated ratio selected from a further group consisting of a carrier to interference ratio and a signal to noise ratio.

29. A method for use with an adaptive orthogonal frequency division-multiplexing (OFDM) system that uses multiple input multiple output (MIMO) structure to transmit OFDM signals from a plurality of transmitters to a plurality of receivers, the OFDM signal having an OFDM frame of a duration, the OFDM frame having data packets and a plurality of OFDM slots, each of the OFDM slots having a plurality of OFDM symbols that include a plurality of sub-carriers, the method comprising:

directing transmission and reception in accordance with OFDM by using controllers, the controllers including those associated with the reception responding to receipt of the OFDM signal by making a determination as to whether time diversity or spatial diversity should be used for subsequent transmissions and transmits a feedback signal indicative of that determination, an implementation of the time diversity resulting in a better robustness to counter signal fading than if the spatial diversity were implemented and an implementation of spatial diversity resulting in an increase in a rate of data packet transfer over that if the time diversity were implemented, because the OFDM signals that are transmitted over multiple ones of the transmitters are independent of each other for the spatial diversity and correspond to each other for the time diversity, the controllers associated with the reception directing that transmission of at least one feedback signal occur that reflects the determination, the controllers including those associated with the transmission that respond to receipt of the feedback signal to direct an encoder to assign constellation points to the sub-carriers in accordance with a channel condition so as to classify each of the sub-carriers into one of two groups, the encoder including a space time transmitter diversity (STTD) encoder and a spatial multiplexing (SM) encoder, the STTD encoder being arranged to encode the sub-carriers classified in one of the groups in accordance with the time diversity and the SM encoder being arranged to encode the sub-carriers classified in the other of the groups in accordance with the spatial diversity.

30. A method as in claim 29, wherein the controllers associated with the reception make a calculation of eigen values of channel matrices to make a determination as to which sub-carriers are to use the time diversity to reduce signal fading forward error correction (FEC) during a subsequent transmission and which sub-carriers are to use the spatial diversity to increase a rate of data transfer during the subsequent transmission, the controllers associated with the reception make the determination based on a comparison between a threshold and at least one of three criteria and to direct transmission of a feed back signal indicative of a result of the determination, at least one of the criteria being based on the calculation, at least another of the criteria being based on elements of a diagonal of at least one of the channel matrices.

31. A method as in claim 29, wherein the controllers associated with the reception make the determination based on a comparison of a channel condition with a threshold, the channel condition being based on a frequency response channel matrix that is derived from OFDM symbols.

32. A method as in claim 31, further comprising calculating a smallest eigen value of the frequency response channel matrix basing the channel condition on the calculating.

33. A method as in claim 31, further comprising determining a smallest element in a diagonal of the frequency response channel matrix and basing the channel condition on the determining.

34. A method as in claim 31, further comprising calculating a ratio of largest and smallest eigen values of the channel matrix and basing the channel condition on the ratio.

35. A method as in claim 31, further comprising basing the channel condition on one of three criteria selected from a group consisting of a calculation of smallest eigen values of the channel matrix, a smallest element in a diagonal of the channel matrix, and a ratio of largest and smallest eigen values of the channel matrix.

36. A method as in claim 29, further comprising determining a modulation scheme on each of the sub-carriers based on an estimated ratio selected from a further group consisting of a carrier to interference ratio and a signal to noise ratio.



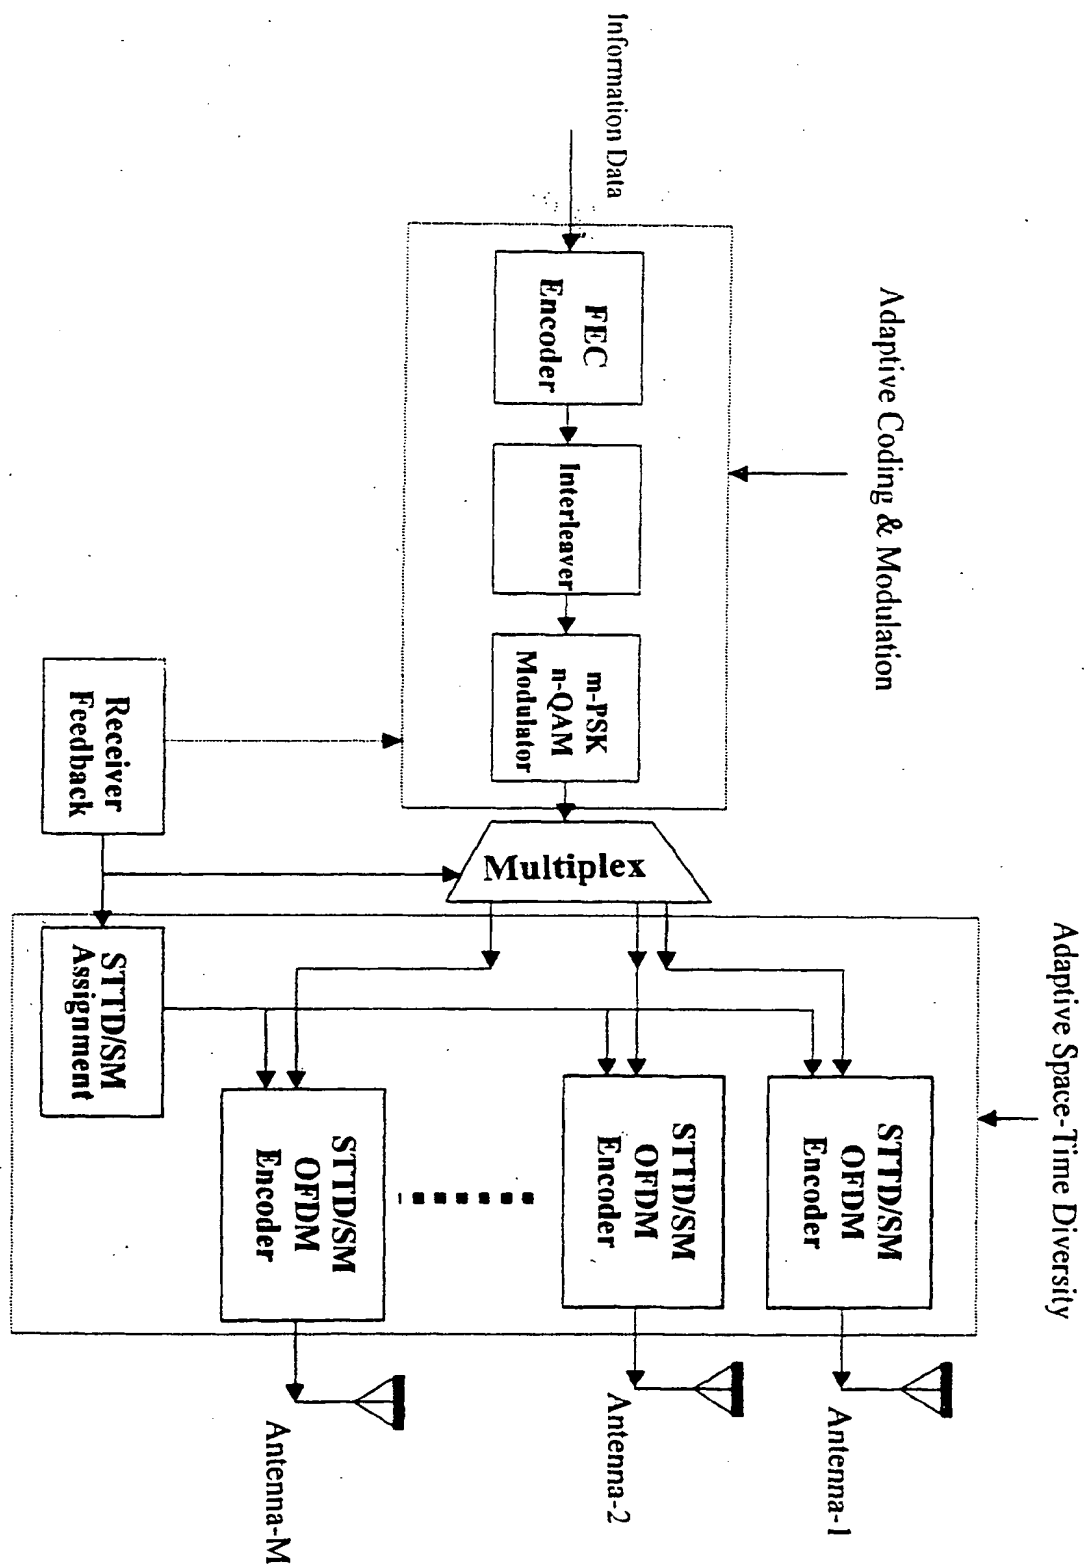



Figure-1

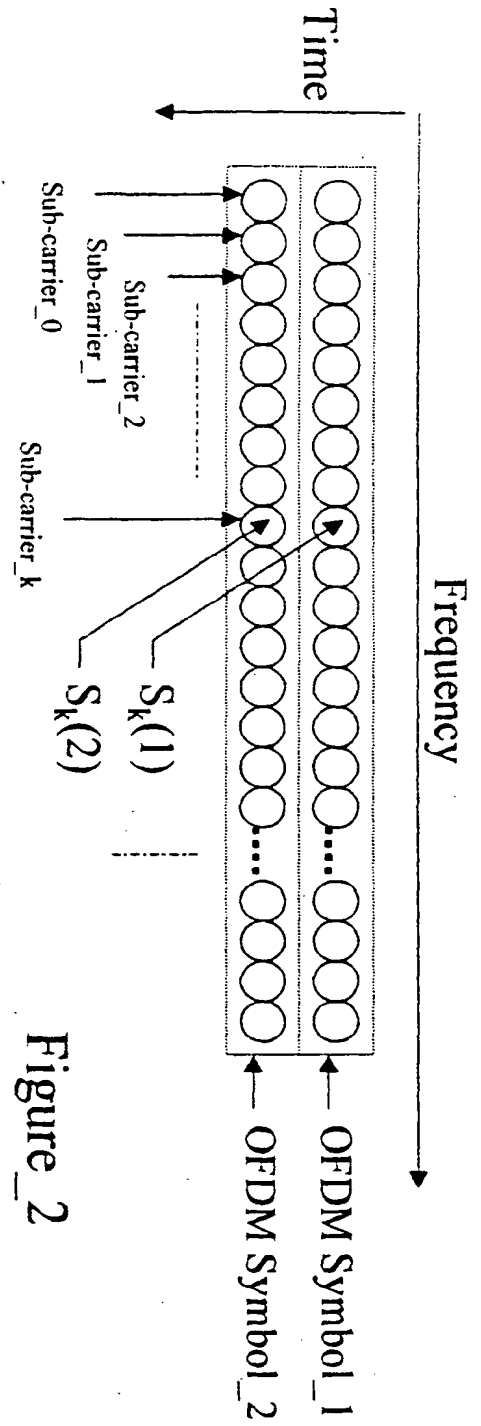


Figure_2

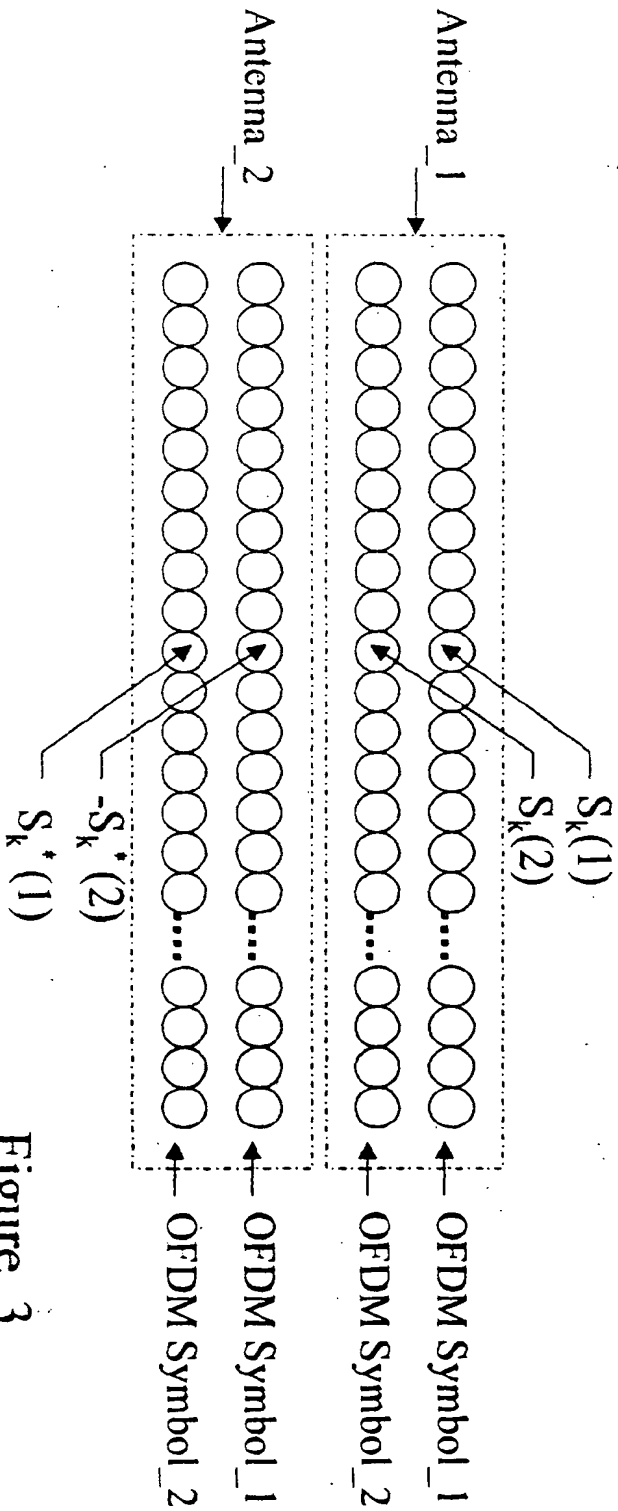


Figure_3

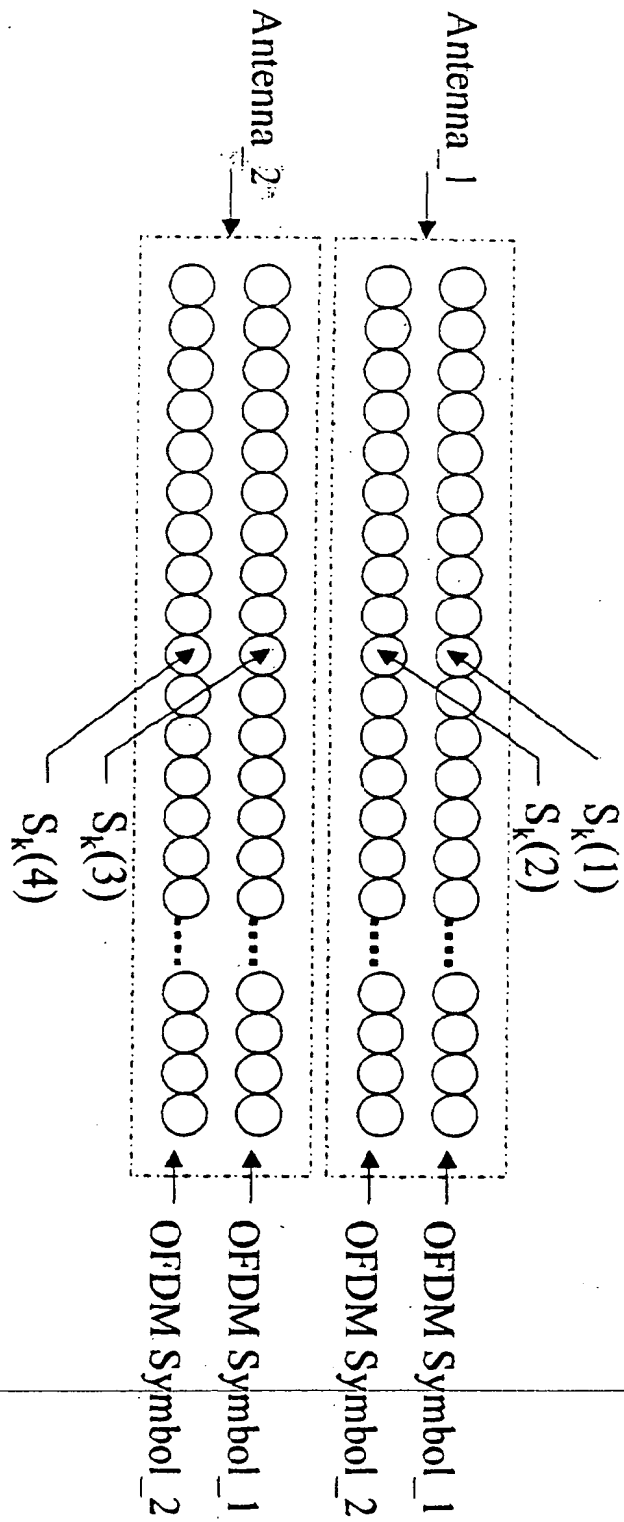


Figure_4

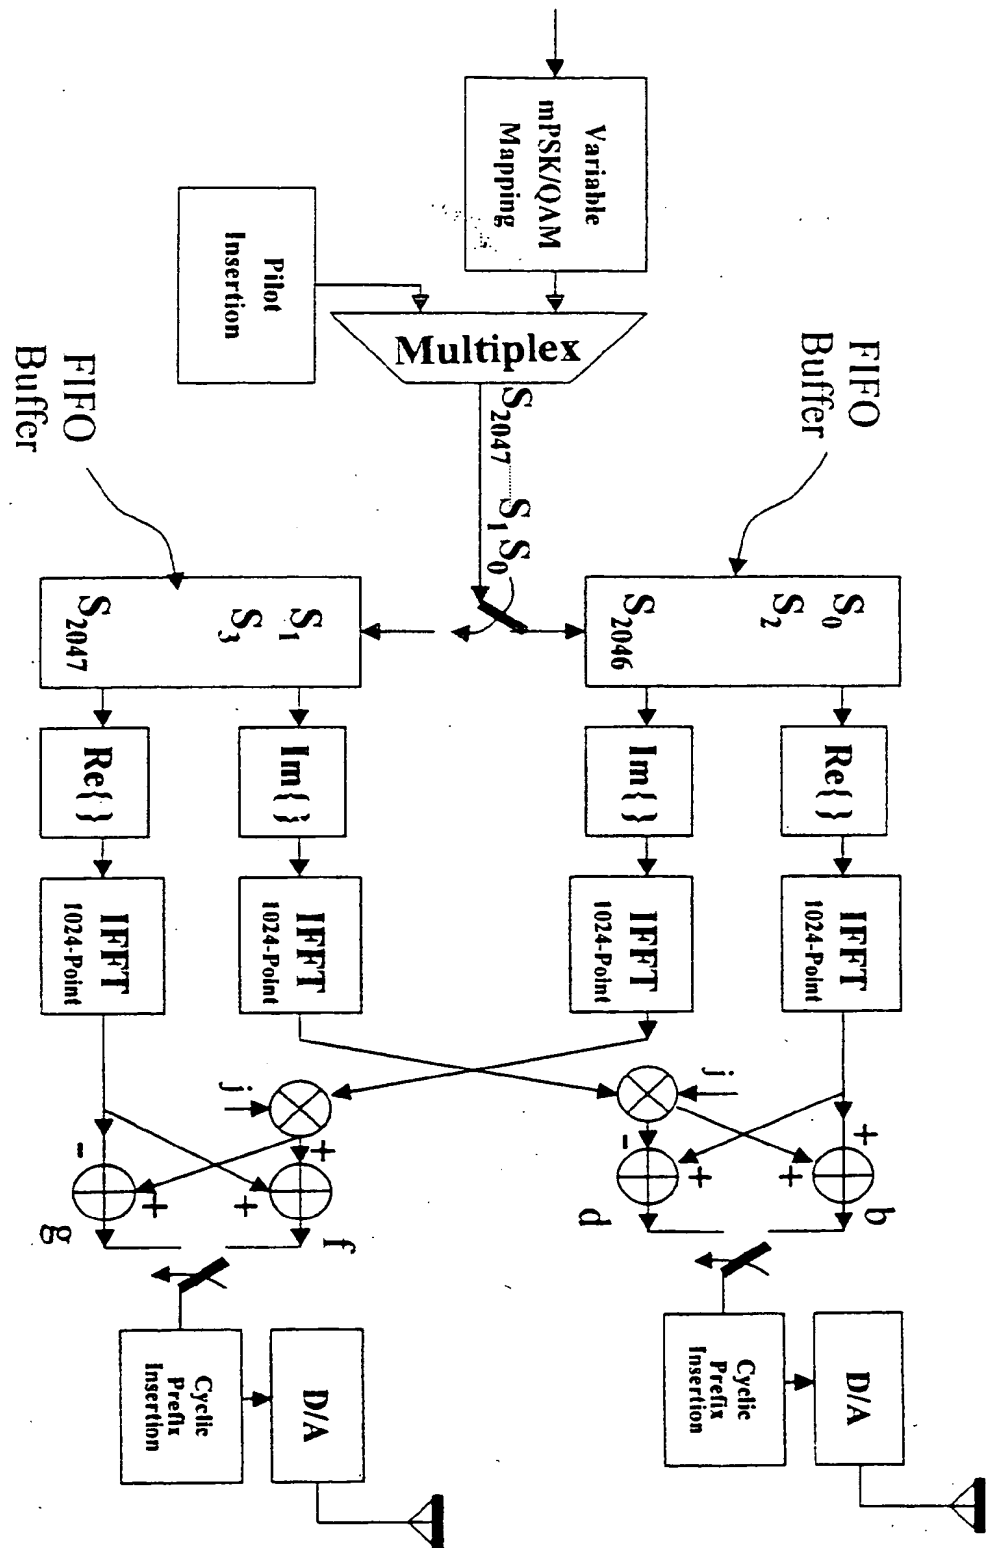



Figure_5

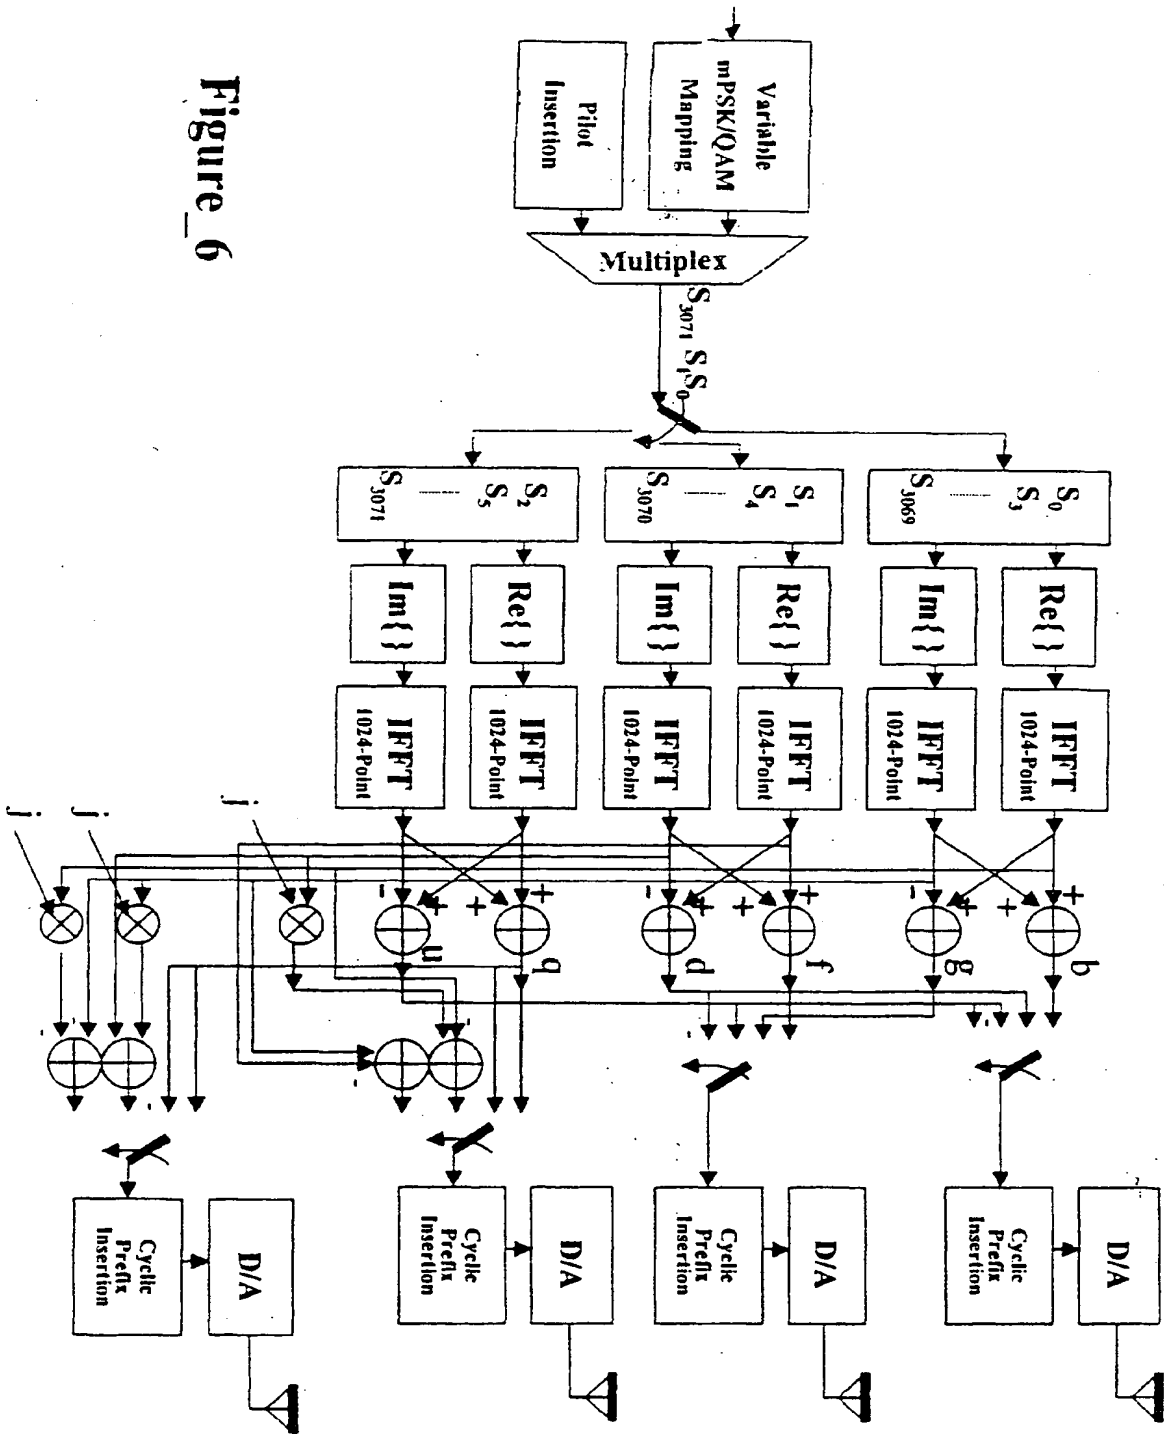


Figure_6

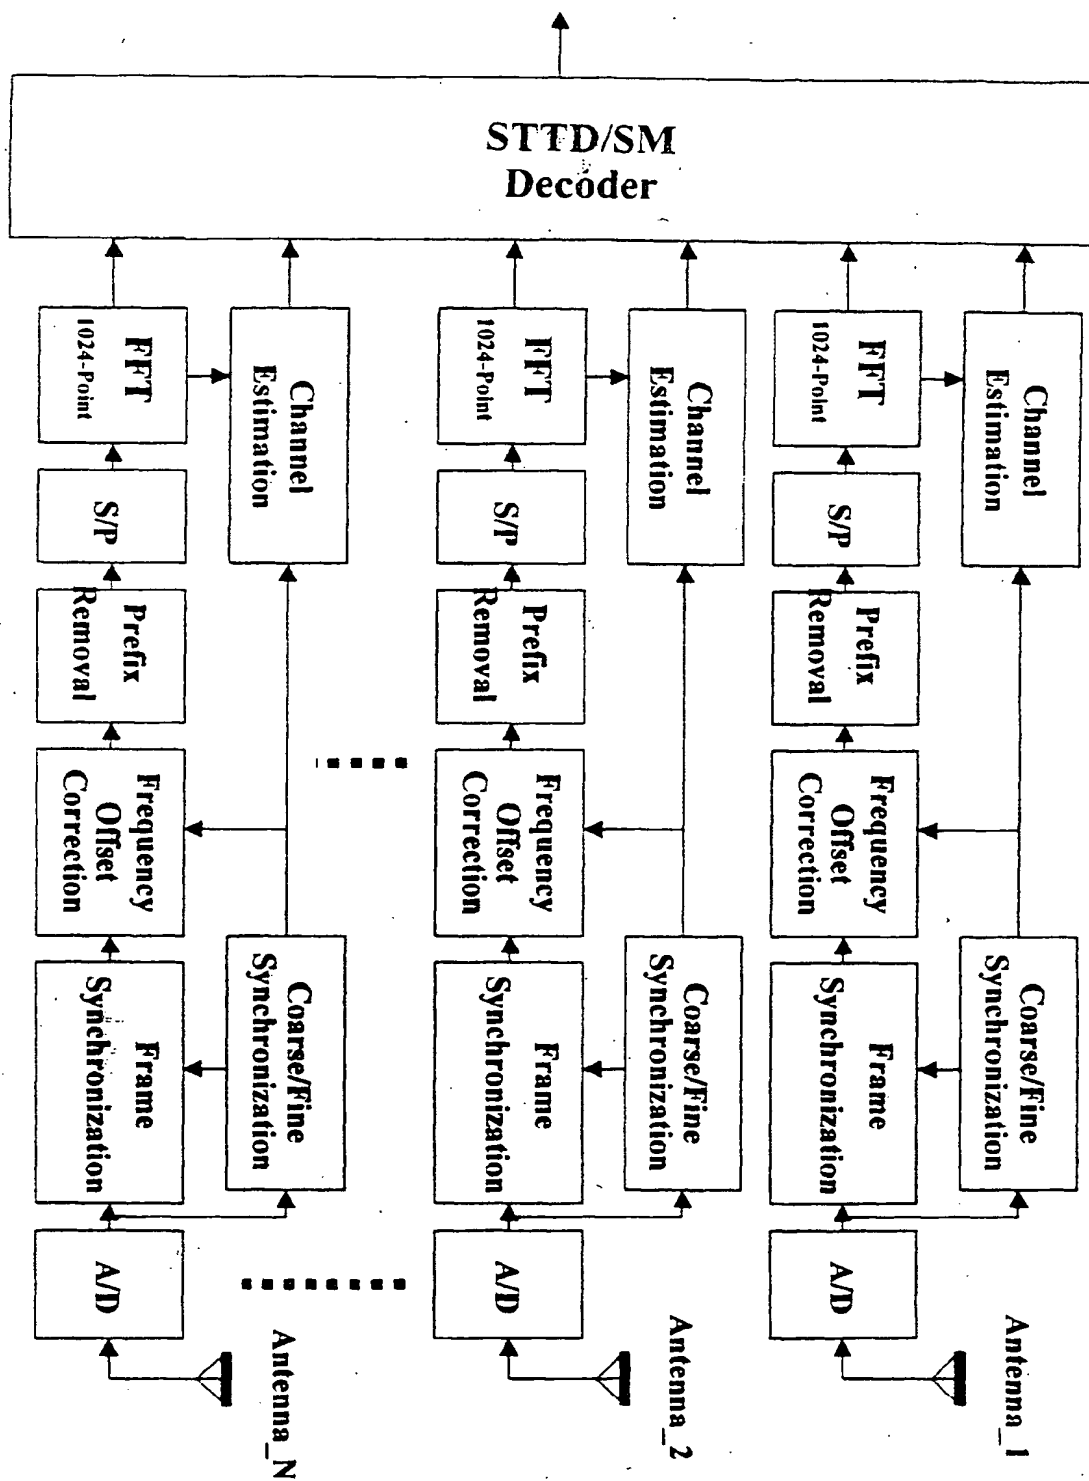

Figure_7

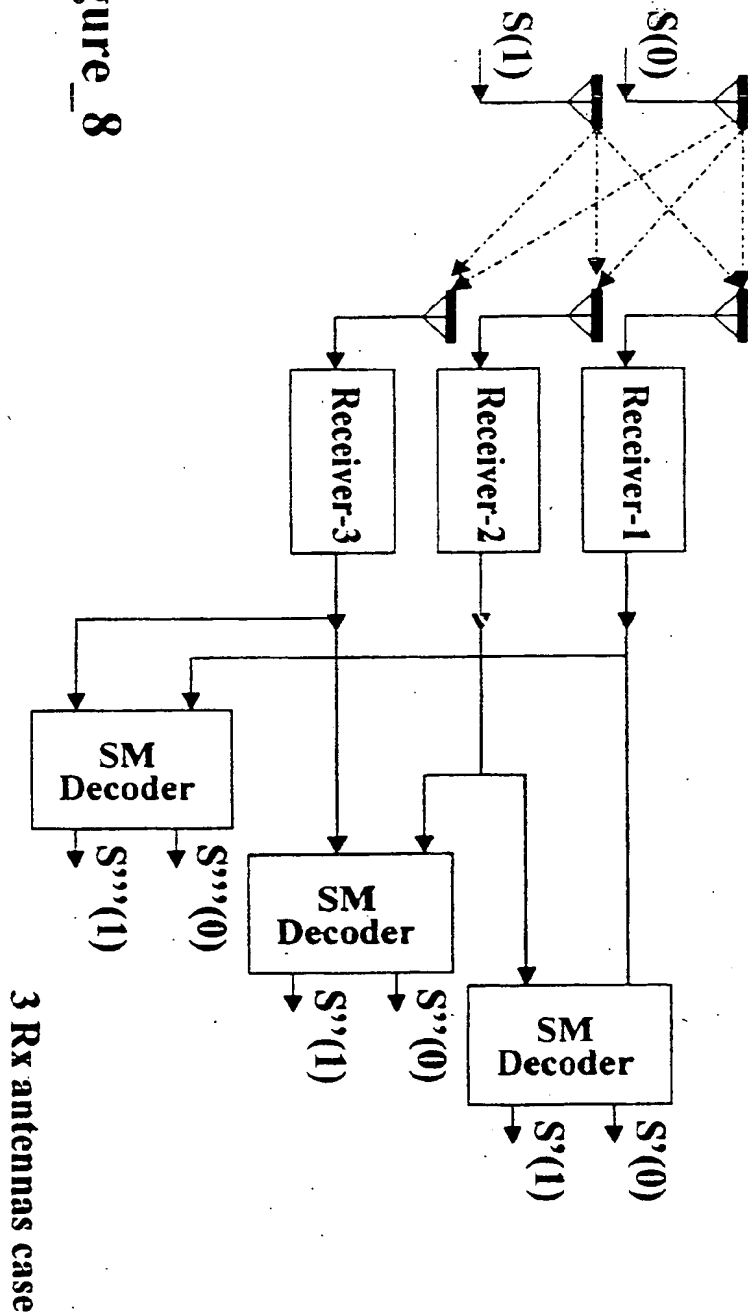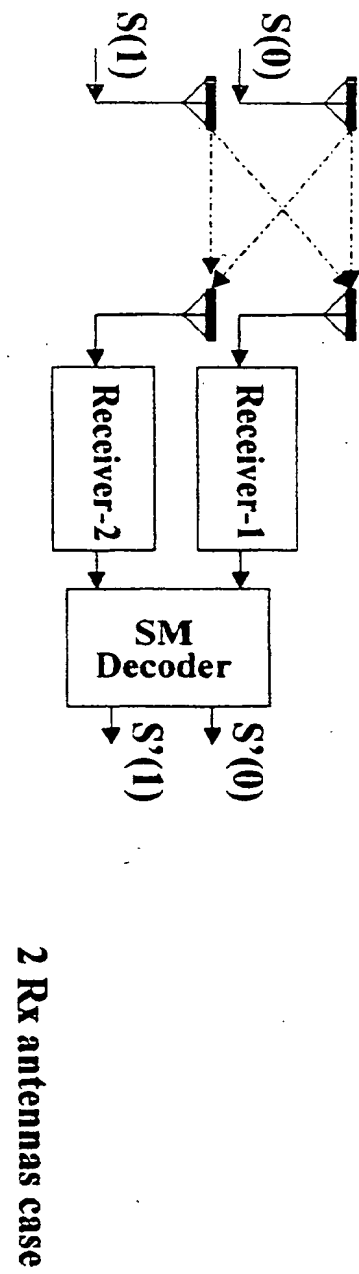

Figure_8



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 185 001 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
27.08.2003 Bulletin 2003/35

(51) Int Cl.7: **H04B 7/06**, H04L 1/06,
H04L 27/26

(43) Date of publication A2:
06.03.2002 Bulletin 2002/10

(21) Application number: **01307097.4**

(22) Date of filing: **21.08.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Wu, Shiquan**
Nepean, Ontario, K2G 6L8 (CA)
• **Tong, Wen**
Ottawa, Ontario K2C 3L7 (CA)
• **Strawczynski, Leo**
Ottawa, Ontario K2A 2J5 (CA)

(30) Priority: **01.09.2000 US 229972 P**
29.12.2000 US 750804

(71) Applicant: **Nortel Networks Limited**
St. Laurent, Quebec H4S 2A9 (CA)

(74) Representative: **Mackenzie, Andrew Bryan et al**
Sommerville & Rushton,
45 Grosvenor Road
St Albans, Herts. AL1 3AW (GB)

(54) **Adaptive time diversity and spatial diversity for OFDM**

(57) An adaptable orthogonal frequency-division multiplexing system (OFDM) that uses a multiple input multiple output (MIMO) to having OFDM signals transmitted either in accordance with time diversity to reducing signal fading or in accordance with spatial diversity to increase the data rate. Sub-carriers are classified for

spatial diversity transmission or for time diversity transmission based on the result of a comparison between threshold values and at least one of three criteria. The criteria includes a calculation of a smallest eigen value of a frequency channel response matrix and a smallest element of a diagonal of the matrix and a ratio of the largest and smallest eigen values of the matrix.

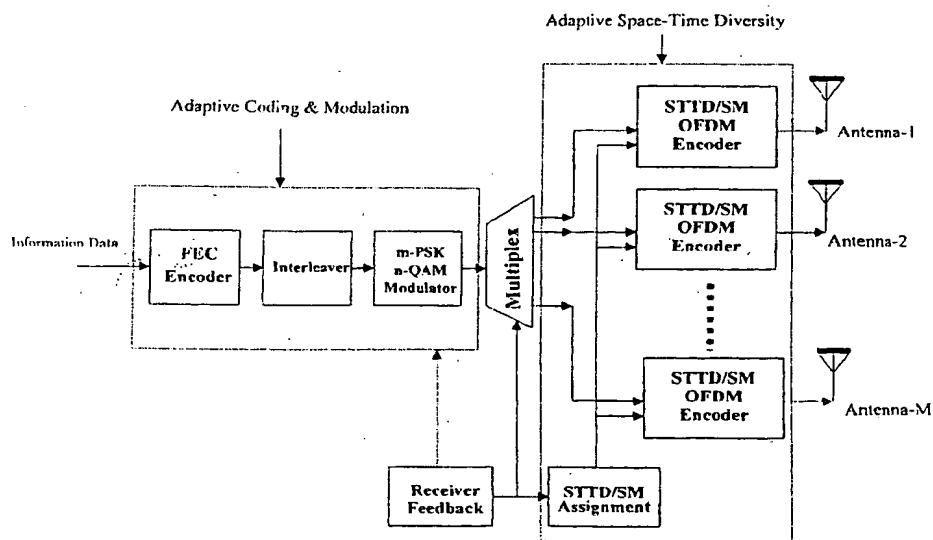


Figure-1

EP 1 185 001 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 7097

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
P,X	WO 01 45300 A (IOSPAN WIRELESS INC) 21 June 2001 (2001-06-21) * abstract * * page 4, paragraph 4 - page 5, paragraph 5 * * page 6, paragraph 2 - page 7, paragraph 1 * * page 10, paragraph 2 - page 11, paragraph 1 * * page 12, paragraph 2 * * page 14, paragraph 4 - page 15, paragraph 1 * * page 16, paragraph 3 * * page 19, paragraph 2 * * figures 1-5 *	1,9-12, 20, 26-29,36	H04B7/06 H04L1/06 H04L27/26
A	WO 98 09381 A (UNIV LELAND STANFORD JUNIOR) 5 March 1998 (1998-03-05) * abstract * * page 6, line 5 - page 7, line 17 * * page 9, line 23 - line 35 * * page 10, line 20 - line 26 * * page 14, line 10 - page 15, line 24 * * page 19, line 6 - line 11 * * page 19, line 36 - page 20, line 4 *	1,9,11, 20,27,29	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04L H04B
A	WO 99 14871 A (AT & T WIRELESS SERVICES INC) 25 March 1999 (1999-03-25) * abstract * * page 3, line 24 - page 4, line 13 * * page 11, line 5 - line 7 * * figures 1-3 *	1,9,11, 20,27,29	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 8 July 2003	Examiner Lopez Márquez, T
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P/C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 7097

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	<p>LI Y G ET AL: "TRANSMITTER DIVERSITY FOR OFDM SYSTEMS AND ITS IMPACTS ON HIGH-RATE WIRELESS NETWORKS"</p> <p>ICC '99. 1999 IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS. CONFERENCE RECORD. VANCOUVER, CA, JUNE 6 - 10, 1999, IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, NEW YORK, NY: IEEE, US, vol. 1, 6 June 1999 (1999-06-06), pages 534-538, XP000898323</p> <p>ISBN: 0-7803-5285-8</p> <p>* page 534, left-hand column, paragraph 1</p> <p>- page 535, right-hand column, paragraph 8</p> <p>*</p>	1,9,11, 20,27,29	<p>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</p>
A	<p>---</p> <p>HYEON WOO LEE ET AL: "PERFORMANCE ANALYSIS OF DOWN LINK TIME SWITCHED TRANSMIT DIVERSITY (TSTD) IN W-CDMA SYSTEM"</p> <p>VTC 2000-SPRING. 2000 IEEE 51ST. VEHICULAR TECHNOLOGY CONFERENCE PROCEEDINGS. TOKYO, JAPAN, MAY 15-18, 2000, IEEE VEHICULAR TECHNOLOGY CONFERENCE, NEW YORK, NY: IEEE, US, vol. 1 OF 3. CONF. 51, 15 May 2000 (2000-05-15), pages 561-565, XP000970682</p> <p>ISBN: 0-7803-5719-1</p> <p>* page 561, left-hand column, paragraph 4</p> <p>- page 562, left-hand column, paragraph 1</p> <p>*</p>	1,9,11, 20,27,29	
P,A	<p>---</p> <p>EP 1 037 303 A (MOTOROLA INC)</p> <p>20 September 2000 (2000-09-20)</p> <p>* abstract *</p> <p>* column 2, line 16 - column 3, line 43 *</p> <p>-----</p>	1,9,11, 20,27,29	
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		8 July 2003	Lopez Marquez, T
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : technological background</p> <p>O : non-written disclosure</p> <p>P : intermediate document</p> <p>T : theory or principle underlying the invention</p> <p>E : earlier patent document, but published on, or after the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (2.82) (P04.001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 7097

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-07-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 0145300	A	21-06-2001	US	6351499 B1	26-02-2002
			AU	2061501 A	25-06-2001
			BR	0016772 A	10-12-2002
			EP	1240730 A1	18-09-2002
			WO	0145300 A1	21-06-2001
			US	6298092 B1	02-10-2001

WO 9809381	A	05-03-1998	AU	4238697 A	19-03-1998
			CA	2302289 A1	05-03-1998
			EP	0920738 A1	09-06-1999
			EP	0931388 A2	28-07-1999
			JP	2001505723 T	24-04-2001
			WO	9809385 A2	05-03-1998
			WO	9809381 A1	05-03-1998
			WO	9809395 A1	05-03-1998
			US	2003072382 A1	17-04-2003
			US	6377631 B1	23-04-2002
			US	6452981 B1	17-09-2002
			US	6144711 A	07-11-2000

WO 9914871	A	25-03-1999	CA	2303388 A1	25-03-1999
			CA	2405875 A1	25-03-1999
			DE	29824760 U1	13-06-2002
			DE	29824761 U1	13-06-2002
			DE	29824762 U1	13-06-2002
			DE	29824763 U1	13-06-2002
			DE	29824765 U1	13-06-2002
			EP	1016228 A1	05-07-2000
			US	6185258 B1	06-02-2001
			WO	9914871 A1	25-03-1999

EP 1037303	A	20-09-2000	EP	1037303 A1	20-09-2000
			CA	2300449 A1	12-09-2000
			JP	2000269869 A	29-09-2000
			US	6373433 B1	16-04-2002

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82